

White Silicone Film/Sheet/Ink

내열, 내UV 성능이 뛰어난 반사 도료


95% 이상의 높은 반사율

[JIS Z 8922 조명기구용 백색 실리콘 잉크 도막] 적합




Film Type

Part Number	SWR-PK-06-2 PET-50
Ink Type	SWR-PK-06-2
Backing Material	PET (50 μ m)
Ink Coating Thickness	80 μ m
Dimensions	Φ 3" roll, 300mm \times 1m \times 130 μ m
Reflectivity	96~98%

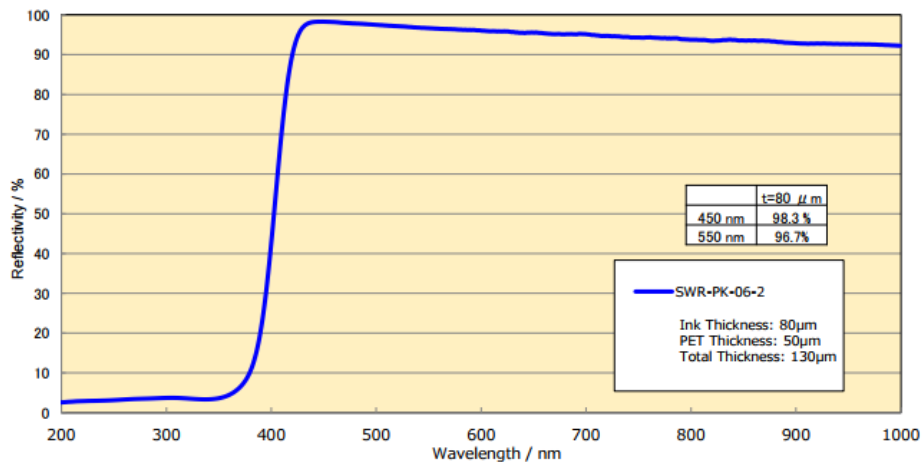

Sheet Type

Part Number	SWR-PK-03F A1050-15
Ink Type	SWR-PK-03F
Backing Material	Aluminum A1050 (1.5mm)
Ink Coating Thickness	100 μ m
Dimensions	300mm×500mm×1.6mm
Reflectivity	96~98%



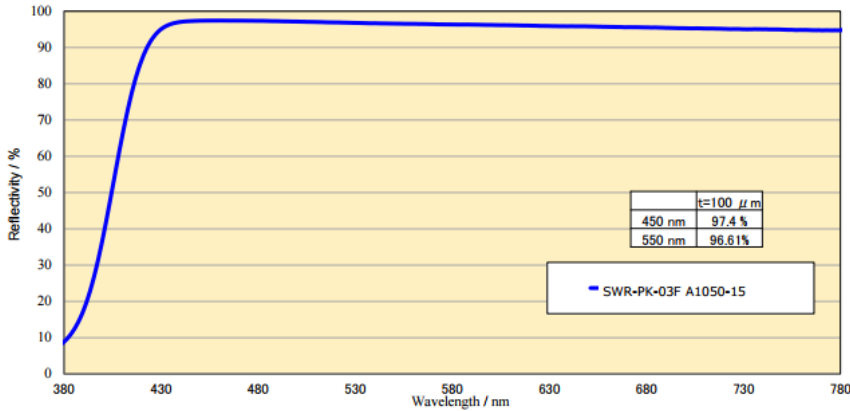


반사 특성

White Silicone Ink

[참고] 표준확산판


일반적인 백색레지스트 잉크

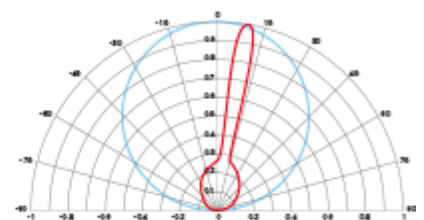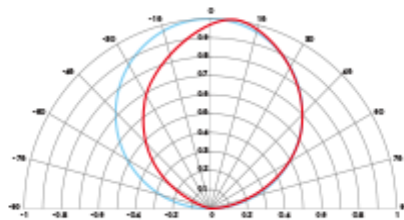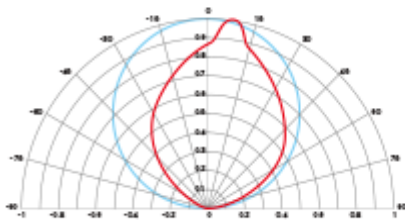

용도



Reflector/반사판/(분무도막)

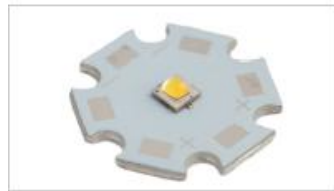

일반Regid기판/LED소자실장
기판용 솔더 레지스트(스크린인쇄)



응용제품
프레스가공품/필름가공품